

## OS-400E




**OS-400E** series standalone DVR, integrates monitor, playback and record functions, can display and record every detail. It is your best choice to use in for digital surveillance products.

With integrative design, the integration of video capture, compression, save and alarm detection assure the high reliability of the whole system.

### Features:

- Simple Structure, easy for design, installation, test, and operation.
- Advanced video compression technology ensures the image record quality, as well as the quick and simple index mode.
- Refined technical design insures the stabilization of the system under long-time running.
- Based embedded system, a reliable and worthy surveillance product.
- Clear image record, suitable for various fields.



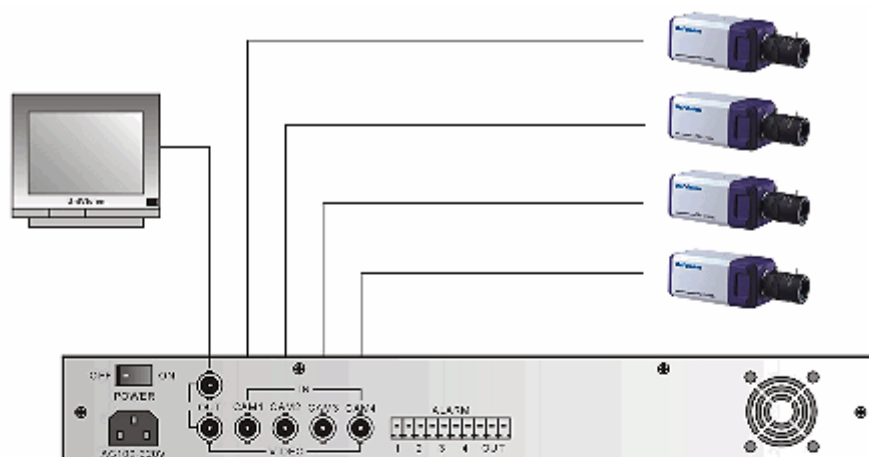

| Model              | Description                             |  | Note      |
|--------------------|---|--|-----------|
| Video System       | NTSC/PAL                                |  |           |
| Operation System   | Embedded OS                             |  |           |
| Video Input        | 4 channel                               |  |           |
| Video Output       | 2 channel                               |  | VCR OUT   |
| Displaying Rate    | NTSC                                    | 120 f/s  | 4×30 f/s  |
|                    | PAL                                     | 100 f/s  | 4×25 f/s  |
| Recording Rate     | NTSC                                    | Max. 30fps   | Sole mode |
|                    | PAL                                     | Max. 25fps   | Sole mode |
| Recording Rate     | NTSC                                    | Max. 7.5fps  | Mix mode  |
|                    | PAL                                     | Max. 6.25fps   | Mix mode  |
| Resolution         | Display                                 | NTSC: 640×480<br>PAL: 720×576                                  |           |
|                    | Record                                  | NTSC: 640×480<br>PAL: 720×576                                  |           |
| Compression Format | Modified MJPEG                          | High: 20k Bytes/f<br>Standard: 16k Bytes/f<br>Low: 12k Bytes/f |           |
| HDD                | 2 HDD                                   | 400G   |           |
| Index              | Time/file list                          |  |           |
| Alarm              | 4 channel input, 1 channel output       |  |           |
| System Monitor     | Resume the operation mode after restart |  |           |
| Power Requirement  | AC 110V-220V/1A                         |  |           |
| Dimensions         | 438mm×296mm×55mm(W×D×H)                 |  |           |
| Weight             | 5300g                                   |  |           |