

## OS-400E




**OS-400E** series standalone DVR, integrates monitor, playback and record functions, can display and record every detail. It is your best choice to use in for digital surveillance products.

With integrative design, the integration of video capture, compression, save and alarm detection assure the high reliability of the whole system.

### Features:

- Simple Structure, easy for design, installation, test, and operation.
- Advanced video compression technology ensures the image record quality, as well as the quick and simple index mode.
- Refined technical design insures the stabilization of the system under long-time running.
- Based embedded system, a reliable and worthy surveillance product.
- Clear image record, suitable for various fields.



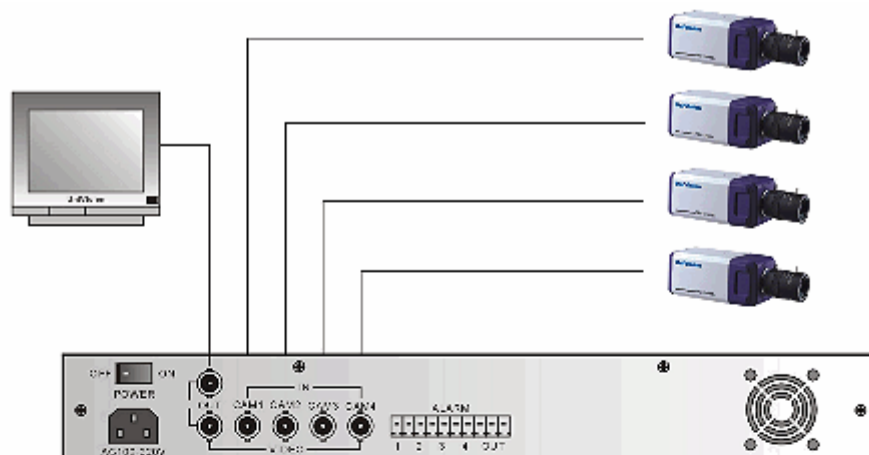

Model	Description		Note
Video System	NTSC/PAL		
Operation System	Embedded OS		
Video Input	4 channel		
Video Output	2 channel		VCR OUT
Displaying Rate	NTSC	120 f/s	4×30 f/s
	PAL	100 f/s	4×25 f/s
Recording Rate	NTSC	Max. 30fps	Sole mode
	PAL	Max. 25fps	Sole mode
Recording Rate	NTSC	Max. 7.5fps	Mix mode
	PAL	Max. 6.25fps	Mix mode
Resolution	Display	NTSC: 640×480 PAL: 720×576	
	Record	NTSC: 640×480 PAL: 720×576	
Compression Format	Modified MJPEG	High: 20k Bytes/f Standard: 16k Bytes/f Low: 12k Bytes/f	
HDD	2 HDD	400G	
Index	Time/file list		
Alarm	4 channel input, 1 channel output		
System Monitor	Resume the operation mode after restart		
Power Requirement	AC 110V-220V/1A		
Dimensions	438mm×296mm×55mm(W×D×H)		
Weight	5300g		